NEW

AEBI

TP410

Transporter

- Powerful Kubota engine
- Extremely light and manoeuvrable
- Simple operation



Aebi TP410 – for extreme terrain

The small transporter that thinks big

Powerful engine
- 3.3 litre Kubota turbo diesel engine with 75 HP (55.4 kW)
- 268 Nm torque
- 32% torque rise
- High PTO output
- Meets new Level V emissions standard

Improved working hydraulics
- Optimised working hydraulics 25 l/175 bar
- Separate hydraulic oil tank

Comfortable working environment thanks to the modern panoramic driver's cab
- New glass doors for optimal overview
- Updated instruments with colour display
- Steering wheel with adjustable height and angle
- Comfortable seat with optional air suspension
- Mobile phone holder
- 12V socket
- Optional DAB+ radio

Driving and braking
- Reverse transmission with 16 forward and reverse gears
- Pre-selectable half gears
- Hydrostatic steering with 45° steering angle
- Hydraulic external power dual-circuit braking system
- Optional spring-loaded brake



Impressive benefits

Clean and strong

The high-performance 3.3 l Kubota engine enables you to accelerate more quickly and work with greater power. In this new generation of engine, the diesel consumption has also been reduced by 5% and the new Level V emissions standard is met, all of which makes the TP410 an attractive proposition, both economically and environmentally.



Modern and easy to use

The updated instruments lend the panoramic driver's cab a whole new look, and give you a perfect overview of all the key functions. The levers and controls for the power take-off shaft, gears and hydraulics have been kept simple, as usual, and need no explanation. As a new feature, you can now switch the hand throttle on and off electronically at the touch of a button, and also control and save the speed.





Safe working in all conditions
- Hill-holder functionality – problem-free starting even on the steepest terrain
- Torsion with optional skew suppression
- Automatic battery isolation switch


Traction in all conditions
- Permanent four-wheel drive
- 100% lockable front, rear and longitudinal axles

Quick attachment changes, lots of options
- Compatible with existing Aebi attachments
- Quick and easy attachment changes

Sound investment
- Exceptional value for money
- Durable, robust design
- High resale value

Optimal ground protection
- 2350 kg unladen weight – lightest in its class
- Large choice of tyres for optimal grip and ground protection

Hydraulic skew suppression

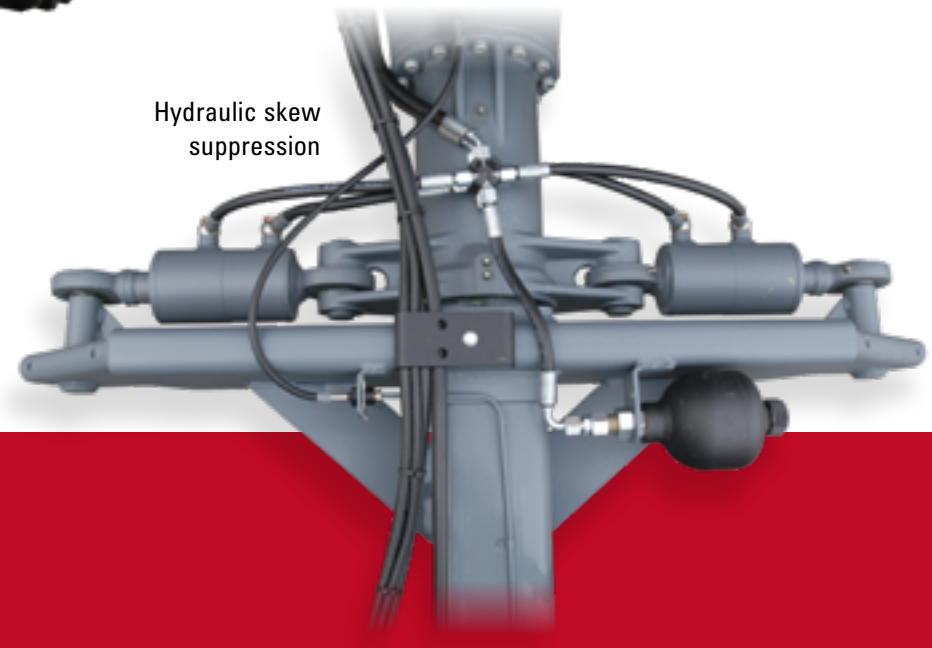




Work worry-free on any terrain

As is customary for any Aebi vehicle, the TP410 has excellent off-road capability and can be used on any terrain. The transporter has limited-slip differentials, hill-holder functionality, optional skew suppression and a new braking system, all of which ensure the best possible safety and control in every situation and allow you to focus fully on your work at all times.

Dimensions

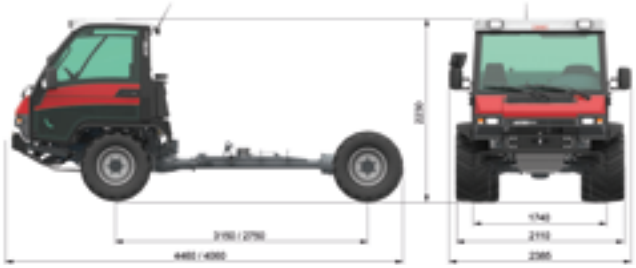

	Aebi TP410
Transporter technical data	
Engine and drive system	
Engine type / emission level	V3307-CR-T / Level V
Engine	Turbo diesel / 55.4 kW / 75 HP / 2,600 1/min
Cylinders / Capacity	4 / 3,331 cm^3
Max. torque / torque rise / at speed	268 / 32% / 1,500 1/min
Consumption	219 g/kWh
Reverse transmission forward / reverse	16 / 16
Forward / reverse speed	2.3-40 / 2.2-35
Rear power take-off shaft speed	600 1/min
Powershift rear take-off shaft	✓
Chassis and tyres	
With lock via multi-plate clutch	✓
Hydraulic skew suppression	Optional
Front-wheel steering turning circle radius – short / long wheelbase	5,700 / 6,400 mm
Handling and equipment	
Panoramic cab with heating	Optional
Set up for digital radio	✓
Hydraulic dual-circuit brake / hill-holder functionality / spring-loaded brake	✓ / ✓ / optional
Hydraulics	
Working hydraulics / oil tank	25 l/min / 175 bar / 40 l
Dimensions and weights	
Tare weight	2,350 kg
Laden weight	5,000 kg / 6,500 kg
Diesel tank capacity	65 l
Width of cab / incl. tyres	1,700 mm / 1,930-2,500 mm
Height	2,230 mm
Wheelbase and length short / long (without attachment)	2,750 / 3,150 and 4,060 / 4,460

Tyre variants



425/55 R17
AS profile

440/50 R17
Terra Profile

15.0/55-17
AS Profile

285/80 R16
Double wheel

7.5 – 18/17
Double wheel

As at 10/2018 Copyright © Aebi Schmidt Holding AG. All rights reserved. Errors and amendments excepted.

We would be happy to help!

Aebi Schmidt Holding AG
Marketing and Communication

Technical data is subject to change.
Illustrations are not binding.

Scan to discover the ASH Group on YouTube.